



Beam&Wash ZoomLed Pixel Control  
SMALLY- PL740PE



**Optics**

7x40W 4IN1 RGBW LED  
Zoom angle: 3° - 45°  
Power Consumption:250W

**Control**

DMX Mode: 21/24/32/60 CH Control  
Mode: DMX512,Master-Slaver,Auto,  
Music, and RDM, Pixel Control

**Pan/Tilt**

Pan/tilt:540° /270° (8/16 bit)

**Construction**

Display: LCD Display  
Data in/out: 3pin XLR Sockets Power  
Socket: PowerConTrue In/out  
Rating: IP20 Double Omega brackets

**Feature**

Beam & wash effect  
Dimmer: 0~100% smooth dimming Quiet  
operation ,Flicker free Smooth zoom and 4  
Dimming Curve, Pixel Control

**Specification**


Dimension: 258x178x334mm  
NW: 5.5 kg GW:6.5 kg  
Flight case packing(6 in 1): 910x570x550mm  
Carton packing(1 in 1):310x230x420mm

**Beam Angle =3.5°**

R lux	17300	5770	2300	871
G lux	39800	11300	4460	1700
B lux	7020	1930	758	291
W lux	61000	18200	7160	2730
4in1 lux	111000	33700	13300	5100

**Beam Angle =45°**

R lux	2430	319	128	51
G lux	4850	621	249	100
B lux	864	111	45	18
W lux	7850	1010	401	162
4in1 lux	14600	1880	751	302

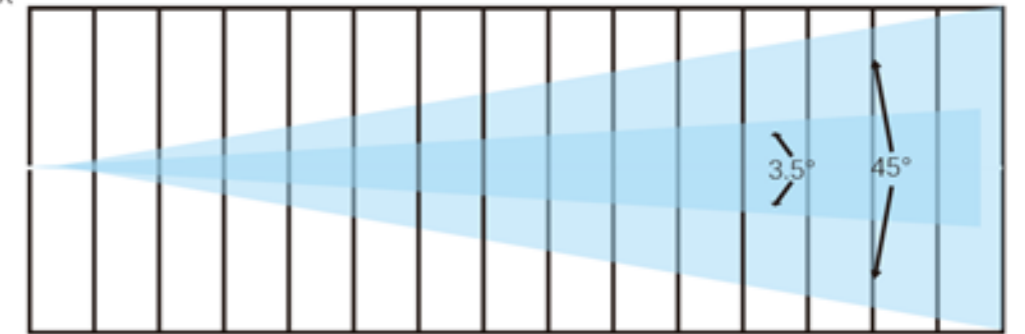

Distance (m)	1	3	5	8
Spot diameter (m) 3.5°	0.23	0.54	0.78	1.28
Spot diameter (m) 45°	1.50	3.00	4.30	

